



Professional Manufacturer of Strapping,Lashing,and Lifting



2017

CHENLI RIGGING




Professional Manufacturer of Strapping,Lashing,and Lifting.

ShanDong Chenli Rigging(Cargo security and lifting products)Co.,Ltd is located in Qingdao Industrial Area Chengyang District,about 15km from Qingdao Airport.We are professional in producing cargo security products and lifting slings such as Polyester Woven Strapping,Polyester Composite Strapping, Ratchet straps,Flat webbing slings and Round slings .Our factory belong to SINOFORGE group who located in Qingdao Commercial centre.SINOFORGE group is focus in Variety Industrial product Supplying and shares good reputation in the industry of lifting ,lashing and rigging.

ShanDong Chenli Rigging will always stick to innovation and aims to build a world-class cargo security and lifting products manufacturing enterprise with professional technology and high-quality products.

Why choose us:

- 1 Strict quality control,our professional quality team inspects every batch of production strictly according to different quality standard in EN,AS/NZS,and USA.
- 2 Flexibility in combining the strong hardware fittings around Qingdao area with the webbing that in house by assembling or Sewwing. As Qingdao is the rigging area and our factory location for webbing making is also in Qingdao area so that make it easy to arrange.
- 3 Excellent customer service,our sales team is professional ,experienced and full of passion. We reply to our customers inquiry and questions within day .Our sales are all with honesty and confidence and ready to serve you with any new products development in the area of cargo security and lifting.
- 4 Competitive in pricing:We understand the market and know the pricing is the key to success. So that we are trying our best to cost control by using more efficient machines with less labour involved.Also Benefitting from the good relationship with our sub-contractor and supplier , we can always get better prices than other traders which make our product line in competitive .

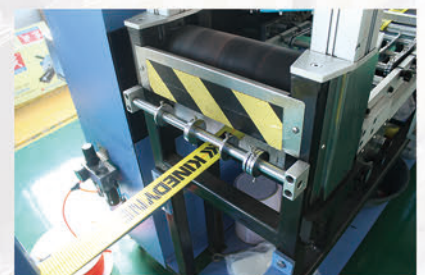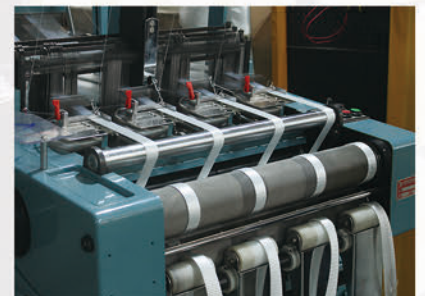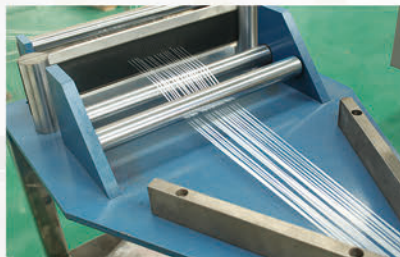

WEBBING SLINGS, ROUND SLINGS AND LIFTING NETS

CHENLI 山东辰力索具有限公司
Cargo Security and Lifting

POLYESTER FLAT WEBBING SLING

POLYESTER ENDLESS WEBBING SLING

POLYESTER ROUND WEBBING SLING

ONE-WAY SLING

HEAVY DUTY FLAT WEBBING SLING FOR USA MARKET





















HEAVY DUTY FLAT WEBBING SLING FOR LATIN AMERICA

LIFTING NETS

WEBBING FITTING


PRODUCT INFORMATION

- Flat slings manufactured to EN1492-1. Round slings manufactured to EN1492-2.
- Flat slings manufactured to AS1353.1 and round slings manufactured to AS4497.1 are available upon request.

	Items	Working Load Limit with 1 sling							Working Load Limit with 2 sling			
		Straight lift	Chocked lift	β					Straight lift up to 45 °	Choked lift up to 45 °	Straight lift 45-60 °	Choked lift 45-60 °
				0-7 °	7-45 °	45-60 °	up to 45 °	45-60 °				
Colour coded according to EN1492	Flat slings comply to EN1492-1											
	Round slings comply to EN1492-2											
	load factor	1	0.8	2	1.4	1	0.7	0.5	1.4	1.12	1	0.8
WLL 1T	Violet	1	0.8	2	1.4	1	700	500	1.4	1.12	1	800
WLL 2T	Green	2	1.6	4	2.8	2	1.4	1	2.8	2.24	2	1.6
WLL 3T	Yellow	3	2.4	6	4.2	3	2.1	1.5	4.2	3.36	3	2.4
WLL 4T	Grey	4	3.2	8	5.6	4	2.8	2	5.6	4.48	4	3.2
WLL 5T	Red	5	4	10	7	5	3.5	2.5	7	5.6	5	4
WLL 6T	Brown	6	4.8	12	8.4	6	4.2	3	8.4	6.72	6	4.8
WLL 8T	Blue	8	6.4	16	11.2	8	5.6	4	11.2	8.96	8	6.4
WLL 10T	Orange	10	8	20	14	10	7	5	14	11.2	10	8
WLL 12T	Orange	12	9.6	24	16.8	12	8.4	6	16.8	13.4	12	9.6

IMPORTANT ADVICE FOR SAFE LIFTING

1. Do not use sling if tag is removed.
2. Inspect sling for damage before each use.
3. Do not use sling if there is any sign of a cut cover, snagging, heat or chemical damage, excessive wear, damaged seams, any other defects or presence of grit, abrasive materials or other deleterious material.
4. Do not tie knots in sling.
5. Protect sling from sharp edges of load.
6. Do not expose sling to temperatures above 90°C.
7. Do not allow abrasive or other damaging grit to penetrate the fibers.
8. Keep away from strong alkalies and phenolic compounds.
9. Consult supplier for configurations not shown on the sling tag or a relevant load chart.
10. Consult supplier before immersing a sling in a chemical solution.

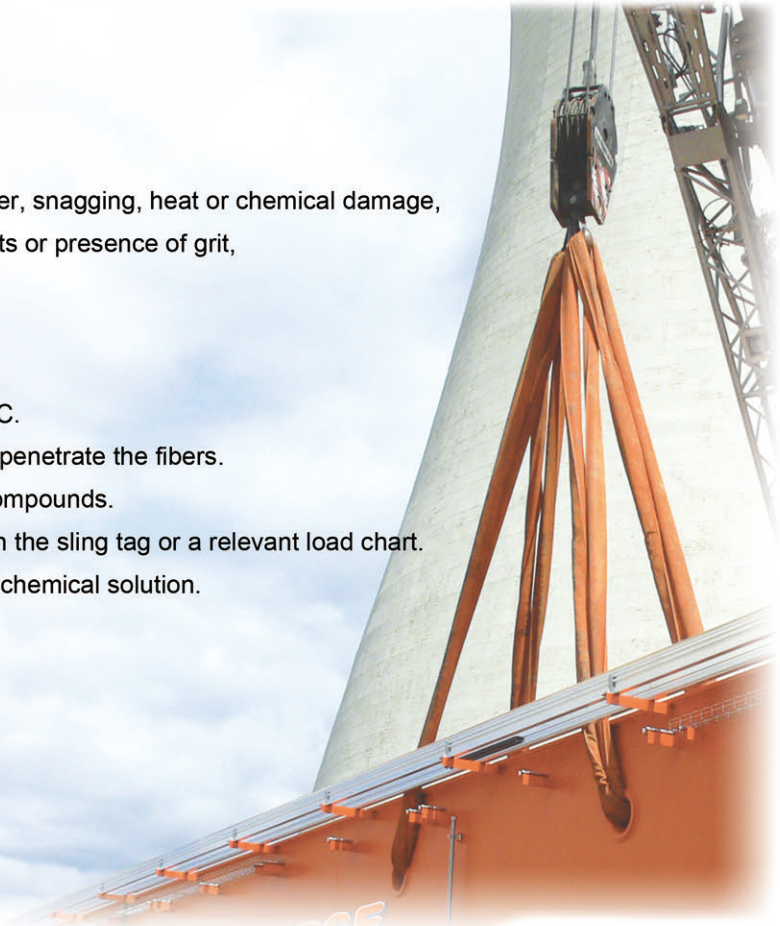

**POLYESTER FLAT WEBBING SLING 7:1**

- Colour coded according to EN 1492-1
- Low elongation.
- Every sling is individually serial numbered, tagged and comes with test certificate.
- Fabricated using 100% polyester yarn and sewn with 2 ply webbing.
- A durable and specially woven, 100% polyester with standard folded eyes that incorporates eye wear padding to provide maximum protection around the eyes.
- Wide & flat load bearing surface
- Safety Factor of 8:1 or 6:1 or 5:1 are available upon request
- 1 ply or 4 ply is available upon request.



1,000KG	VIOLET
width: 50mm	
CODE	LENGTH(M)
FSE-2-1000-0.5	0.5
FSE-2-1000-1	1.0
FSE-2-1000-1.5	1.5
FSE-2-1000-2	2.0
FSE-2-1000-2.5	2.5
FSE-2-1000-3	3.0
FSE-2-1000-3.5	3.5
FSE-2-1000-4	4.0
FSE-2-1000-4.5	4.5
FSE-2-1000-5	5.0
FSE-2-1000-5.5	5.5
FSE-2-1000-6	6.0
FSE-2-1000-7	7.0
FSE-2-1000-8	8.0
FSE-2-1000-9	9.0
FSE-2-1000-10	10.0

2,000KG	GREEN
width: 60mm	
CODE	LENGTH(M)
FSE-2-2000-0.5	0.5
FSE-2-2000-1	1.0
FSE-2-2000-1.5	1.5
FSE-2-2000-2	2.0
FSE-2-2000-2.5	2.5
FSE-2-2000-3	3.0
FSE-2-2000-3.5	3.5
FSE-2-2000-4	4.0
FSE-2-2000-4.5	4.5
FSE-2-2000-5	5.0
FSE-2-2000-5.5	5.5
FSE-2-2000-6	6.0
FSE-2-2000-7	7.0
FSE-2-2000-8	8.0
FSE-2-2000-9	9.0
FSE-2-2000-10	10.0

3,000KG	YELLOW
width: 90mm	
CODE	LENGTH(M)
FSE-2-3000-1	1.0
FSE-2-3000-1.5	1.5
FSE-2-3000-2	2.0
FSE-2-3000-2.5	2.5
FSE-2-3000-3	3.0
FSE-2-3000-3.5	3.5
FSE-2-3000-4	4.0
FSE-2-3000-4.5	4.5
FSE-2-3000-5	5.0
FSE-2-3000-5.5	5.5
FSE-2-3000-6	6.0
FSE-2-3000-6.5	6.5
FSE-2-3000-7	7.0
FSE-2-3000-8	8.0
FSE-2-3000-10	10.0

4,000KG	GREY
width: 120mm	
CODE	LENGTH(M)
FSE-2-4000-1	1.0
FSE-2-4000-1.5	1.5
FSE-2-4000-2	2.0
FSE-2-4000-2.5	2.5
FSE-2-4000-3	3.0
FSE-2-4000-3.5	3.5
FSE-2-4000-4	4.0
FSE-2-4000-4.5	4.5
FSE-2-4000-5	5.0
FSE-2-4000-5.5	5.5
FSE-2-4000-6	6.0
FSE-2-4000-6.5	6.5
FSE-2-4000-7	7.0
FSE-2-4000-8	8.0
FSE-2-4000-10	10.0

5,000KG	RED
width: 150mm	
CODE	LENGTH(M)
FSE-2-5000-1.5	1.5
FSE-2-5000-2	2.0
FSE-2-5000-3	3.0
FSE-2-5000-4	4.0
FSE-2-5000-5	5.0
FSE-2-5000-6	6.0
FSE-2-5000-7	7.0
FSE-2-5000-8	8.0
FSE-2-5000-9	9.0
FSE-2-5000-10	10.0


6,000KG	BROWN
width: 180mm	
CODE	LENGTH(M)
FSE-2-6000-1.5	1.5
FSE-2-6000-2	2.0
FSE-2-6000-3	3.0
FSE-2-6000-4	4.0
FSE-2-6000-5	5.0
FSE-2-6000-6	6.0
FSE-2-6000-7	7.0
FSE-2-6000-8	8.0
FSE-2-6000-9	9.0
FSE-2-6000-10	10.0

8,000KG	BLUE
width: 240mm	
CODE	LENGTH(M)
FSE-2-8000-1.5	1.5
FSE-2-8000-2	2.0
FSE-2-8000-3	3.0
FSE-2-8000-4	4.0
FSE-2-8000-5	5.0
FSE-2-8000-6	6.0
FSE-2-8000-7	7.0
FSE-2-8000-8	8.0
FSE-2-8000-9	9.0
FSE-2-8000-10	10.0

10,000KG	ORANGE
width: 300mm	
CODE	LENGTH(M)
FSE-2-10000-1.5	1.5
FSE-2-10000-2	2.0
FSE-2-10000-3	3.0
FSE-2-10000-4	4.0
FSE-2-10000-5	5.0
FSE-2-10000-6	6.0
FSE-2-10000-7	7.0
FSE-2-10000-8	8.0
FSE-2-10000-9	9.0
FSE-2-10000-10	10.0

POLYESTER ENDLESS WEBBING SLING

- Colour coded according to EN 1492-1.
- Low elongation.
- Extra strong webbing for a high abrasion resistance.
- Every sling is individually serial numbered, tagged and comes with test certificate.
- Fabricated using 100% polyester yarn and sewn with 1 or 2 ply webbing.
- Wide & flat load bearing surface.
- Safety Factor of 8:1 or 6:1 or 5:1 are available upon request.

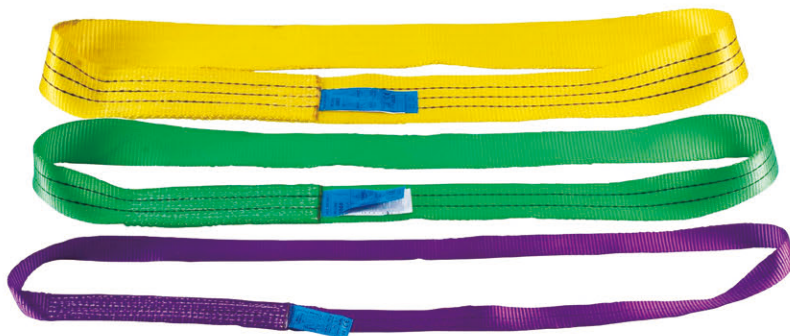


1 PLY WEBBING	
250KG	
CODE	LENGTH(M)
ESE-1-250-1	1.0
ESE-1-250-1.5	1.5
ESE-1-250-2	2.0
ESE-1-250-2.5	2.5
ESE-1-250-3	3.0
ESE-1-250-3.5	3.5
ESE-1-250-4	4.0
ESE-1-250-4.5	4.5
ESE-1-250-5	5.0
ESE-1-250-6	6.0
ESE-1-250-7	7.0
ESE-1-250-8	8.0
ESE-1-250-9	9.0
ESE-1-250-10	10.0

1 PLY WEBBING	
500KG	
CODE	LENGTH(M)
ESE-1-500-1	1.0
ESE-1-500-1.5	1.5
ESE-1-500-2	2.0
ESE-1-500-2.5	2.5
ESE-1-500-3	3.0
ESE-1-500-3.5	3.5
ESE-1-500-4	4.0
ESE-1-500-4.5	4.5
ESE-1-500-5	5.0
ESE-1-500-6	6.0
ESE-1-500-7	7.0
ESE-1-500-8	8.0
ESE-1-500-9	9.0
ESE-1-500-10	10.0

1 PLY WEBBING	
750KG	
CODE	LENGTH(M)
ESE-1-750-1	1.0
ESE-1-750-1.5	1.5
ESE-1-750-2	2.0
ESE-1-750-2.5	2.5
ESE-1-750-3	3.0
ESE-1-750-3.5	3.5
ESE-1-750-4	4.0
ESE-1-750-4.5	4.5
ESE-1-750-5	5.0
ESE-1-750-6	6.0
ESE-1-750-7	7.0
ESE-1-750-8	8.0
ESE-1-750-9	9.0
ESE-1-750-10	10.0

1 PLY WEBBING	
1,000KG	VIOLET
CODE	LENGTH(M)
ESE-1-1000-1	1.0
ESE-1-1000-1.5	1.5
ESE-1-1000-2	2.0
ESE-1-1000-2.5	2.5
ESE-1-1000-3	3.0
ESE-1-1000-3.5	3.5
ESE-1-1000-4	4.0
ESE-1-1000-4.5	4.5
ESE-1-1000-5	5.0
ESE-1-1000-6	6.0
ESE-1-1000-7	7.0
ESE-1-1000-8	8.0
ESE-1-1000-9	9.0
ESE-1-1000-10	10.0

Nylon Strap available upon request

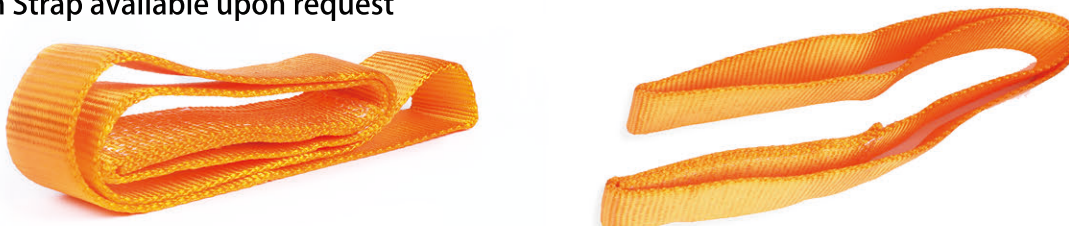



POLYESTER ENDLESS WEBBING SLING

1 PLY WEBBING	
2,000KG	GREEN
CODE	LENGTH(M)
ESE-1-2000-1	1.0
ESE-1-2000-1.5	1.5
ESE-1-2000-2	2.0
ESE-1-2000-2.5	2.5
ESE-1-2000-3	3.0
ESE-1-2000-3.5	3.5
ESE-1-2000-4	4.0
ESE-1-2000-4.5	4.5
ESE-1-2000-5	5.0
ESE-1-2000-6	6.0
ESE-1-2000-7	7.0
ESE-1-2000-8	8.0
ESE-1-2000-9	9.0
ESE-1-2000-10	10.0

1 PLY WEBBING	
3,000KG	YELLOW
CODE	LENGTH(M)
ESE-1-3000-1	1.0
ESE-1-3000-1.5	1.5
ESE-1-3000-2	2.0
ESE-1-3000-2.5	2.5
ESE-1-3000-3	3.0
ESE-1-3000-3.5	3.5
ESE-1-3000-4	4.0
ESE-1-3000-4.5	4.5
ESE-1-3000-5	5.0
ESE-1-3000-6	6.0
ESE-1-3000-7	7.0
ESE-1-3000-8	8.0
ESE-1-3000-9	9.0
ESE-1-3000-10	10.0

1 PLY WEBBING	
4,000KG	GREY
CODE	LENGTH(M)
ESE-1-4000-1	1.0
ESE-1-4000-1.5	1.5
ESE-1-4000-2	2.0
ESE-1-4000-2.5	2.5
ESE-1-4000-3	3.0
ESE-1-4000-3.5	3.5
ESE-1-4000-4	4.0
ESE-1-4000-4.5	4.5
ESE-1-4000-5	5.0
ESE-1-4000-6	6.0
ESE-1-4000-7	7.0
ESE-1-4000-8	8.0
ESE-1-4000-9	9.0
ESE-1-4000-10	10.0

2 PLY WEBBING	
2,000KG	GREEN
CODE	LENGTH(M)
ESE-2-2000-1	1.0
ESE-2-2000-1.5	1.5
ESE-2-2000-2	2.0
ESE-2-2000-2.5	2.5
ESE-2-2000-3	3.0
ESE-2-2000-3.5	3.5
ESE-2-2000-4	4.0
ESE-2-2000-4.5	4.5
ESE-2-2000-5	5.0
ESE-2-2000-6	6.0
ESE-2-2000-7	7.0
ESE-2-2000-8	8.0
ESE-2-2000-9	9.0
ESE-2-2000-10	10.0

2 PLY WEBBING	
4,000KG	GREY
CODE	LENGTH(M)
ESE-2-4000-1	1.0
ESE-2-4000-1.5	1.5
ESE-2-4000-2	2.0
ESE-2-4000-2.5	2.5
ESE-2-4000-3	3.0
ESE-2-4000-3.5	3.5
ESE-2-4000-4	4.0
ESE-2-4000-4.5	4.5
ESE-2-4000-5	5.0
ESE-2-4000-6	6.0
ESE-2-4000-7	7.0
ESE-2-4000-8	8.0
ESE-2-4000-9	9.0
ESE-2-4000-10	10.0

2 PLY WEBBING	
6,000KG	BROWN
CODE	LENGTH(M)
ESE-2-6000-1.5	1.5
ESE-2-6000-2	2.0
ESE-2-6000-3	3.0
ESE-2-6000-4	4.0
ESE-2-6000-5	5.0
ESE-2-6000-6	6.0
ESE-2-6000-7	7.0
ESE-2-6000-8	8.0
ESE-2-6000-9	9.0
ESE-2-6000-10	10.0

2 PLY WEBBING	
8,000KG	BLUE
CODE	LENGTH(M)
ESE-2-8000-1.5	1.5
ESE-2-8000-2	2.0
ESE-2-8000-3	3.0
ESE-2-8000-4	4.0
ESE-2-8000-5	5.0
ESE-2-8000-6	6.0
ESE-2-8000-7	7.0
ESE-2-8000-8	8.0
ESE-2-8000-9	9.0
ESE-2-8000-10	10.0

2 PLY WEBBING	
10,000KG	ORANGE
CODE	LENGTH(M)
ESE-2-10000-1.5	1.5
ESE-2-10000-2	2.0
ESE-2-10000-3	3.0
ESE-2-10000-4	4.0
ESE-2-10000-5	5.0
ESE-2-10000-6	6.0
ESE-2-10000-7	7.0
ESE-2-10000-8	8.0
ESE-2-10000-9	9.0
ESE-2-10000-10	10.0

DIN60005 ONE-WAY SLING


- Manufactured according to DIN60005.
- Used mainly in the field of building, wood production.
- Permitted to be used only once.
- Every one-way sling is individually serial numbered, tagged and comes with test certificate.
- Fabricated using 100% polyester.
- Very beneficial price.

Code	WLL (kgs)	Webbing Width (mm)
DOWS-75	750	50
DOWS-100	1000	50
DOWS-140	1400	50





POLYESTER ROUND WEBBING SLING

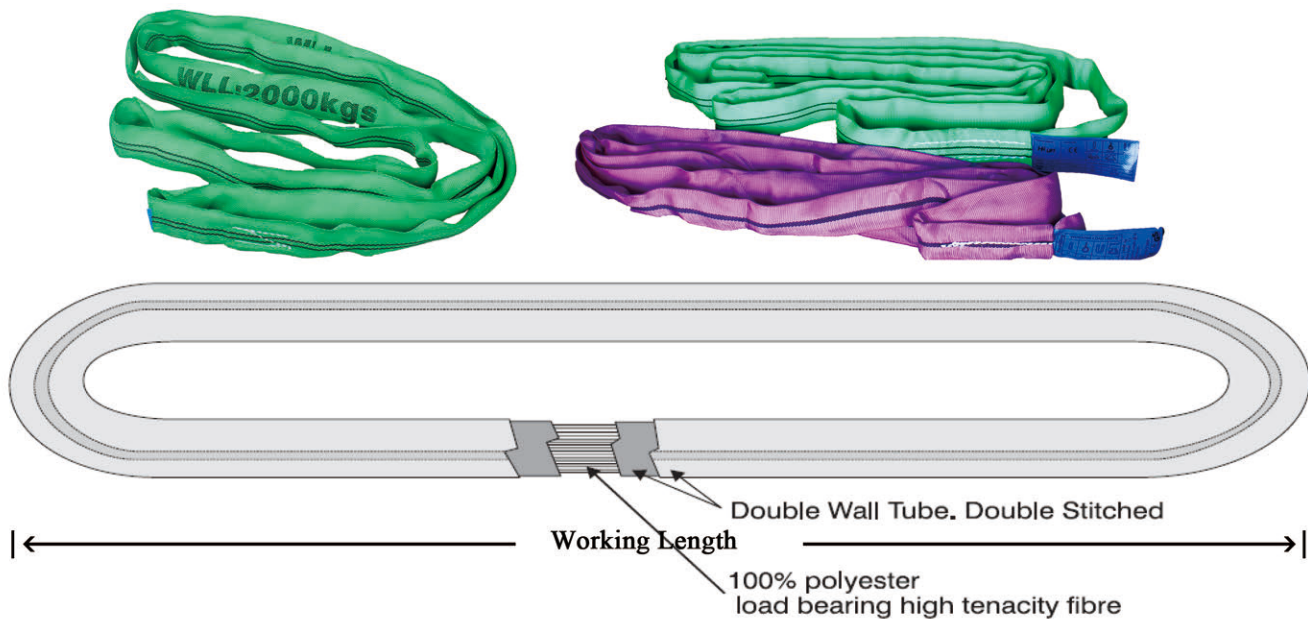

- Colour coded according to EN 1492-2
- Low elongation & extremely wear-resistant
- Every sling is individually serial numbered, tagged and comes with test certificate.
- Fabricated using 100% polyester yarn and wound in a continuous hank to form an endless sling.
- A durable and specially woven, 100% polyester non-load bearing tubular sleeve to give maximum wear protection to the yarn hank.
- Extra strong PU-impregnated webbing of the sleeve, which does not allow dirt to enter.
- Each sling is packed in plastic with CE declaration of conformity or Test Certificate.
- The safe working load is clearly and continuously printed on the sleeve.
- Safety Factor of 8:1 or 6:1 or 5:1 are available upon request
- Double Sleeve

**WLL 1000KG**

1,000KG	VIOLET
CODE	LENGTH(M)
RSE-1000-0.5	0.5
RSE-1000-1	1.0
RSE-1000-1.5	1.5
RSE-1000-2	2.0
RSE-1000-2.5	2.5
RSE-1000-3	3.0
RSE-1000-3.5	3.5
RSE-1000-4	4.0
RSE-1000-4.5	4.5
RSE-1000-5	5.0
RSE-1000-5.5	5.5
RSE-1000-6	6.0
RSE-1000-7	7.0
RSE-1000-8	8.0
RSE-1000-10	10.0

WLL 2000KG

2,000KG	GREEN
CODE	LENGTH(M)
RSE-2000-0.5	0.5
RSE-2000-1	1.0
RSE-2000-1.5	1.5
RSE-2000-2	2.0
RSE-2000-2.5	2.5
RSE-2000-3	3.0
RSE-2000-3.5	3.5
RSE-2000-4	4.0
RSE-2000-4.5	4.5
RSE-2000-5	5.0
RSE-2000-5.5	5.5
RSE-2000-6	6.0
RSE-2000-7	7.0
RSE-2000-8	8.0
RSE-2000-10	10.0

WLL 3000KG

3,000KG	YELLOW
CODE	LENGTH(M)
RSE-3000-0.5	0.5
RSE-3000-1	1.0
RSE-3000-1.5	1.5
RSE-3000-2	2.0
RSE-3000-2.5	2.5
RSE-3000-3	3.0
RSE-3000-3.5	3.5
RSE-3000-4	4.0
RSE-3000-4.5	4.5
RSE-3000-5	5.0
RSE-3000-5.5	5.5
RSE-3000-6	6.0
RSE-3000-7	7.0
RSE-3000-8	8.0
RSE-3000-10	10.0

WLL 4000KG

4,000KG	GREY
CODE	LENGTH(M)
RSE-4000-0.5	0.5
RSE-4000-1	1.0
RSE-4000-1.5	1.5
RSE-4000-2	2.0
RSE-4000-2.5	2.5
RSE-4000-3	3.0
RSE-4000-3.5	3.5
RSE-4000-4	4.0
RSE-4000-4.5	4.5
RSE-4000-5	5.0
RSE-4000-5.5	5.5
RSE-4000-6	6.0
RSE-4000-7	7.0
RSE-4000-8	8.0
RSE-4000-10	10.0



POLYESTER ROUND WEBBING SLING

WLL 5000KG

5,000KG	RED
CODE	LENGTH(M)
RSE-5000-1	1.0
RSE-5000-1.5	1.5
RSE-5000-2	2.0
RSE-5000-2.5	2.5
RSE-5000-3	3.0
RSE-5000-3.5	3.5
RSE-5000-4	4.0
RSE-5000-4.5	4.5
RSE-5000-5	5.0
RSE-5000-5.5	5.5
RSE-5000-6	6.0
RSE-5000-7	7.0
RSE-5000-8	8.0
RSE-5000-10	10.0

WLL 6000KG

6,000KG	BROWN
CODE	LENGTH(M)
RSE-6000-1	1.0
RSE-6000-1.5	1.5
RSE-6000-2	2.0
RSE-6000-2.5	2.5
RSE-6000-3	3.0
RSE-6000-3.5	3.5
RSE-6000-4	4.0
RSE-6000-4.5	4.5
RSE-6000-5	5.0
RSE-6000-5.5	5.5
RSE-6000-6	6.0
RSE-6000-7	7.0
RSE-6000-8	8.0
RSE-6000-10	10.0

WLL 8000KG

8,000KG	BLUE
CODE	LENGTH(M)
RSE-8000-1	1.0
RSE-8000-1.5	1.5
RSE-8000-2	2.0
RSE-8000-2.5	2.5
RSE-8000-3	3.0
RSE-8000-3.5	3.5
RSE-8000-4	4.0
RSE-8000-4.5	4.5
RSE-8000-5	5.0
RSE-8000-5.5	5.5
RSE-8000-6	6.0
RSE-8000-7	7.0
RSE-8000-8	8.0
RSE-8000-10	10.0

WLL 10000KG

10,000KG	ORANGE
CODE	LENGTH(M)
RSE-10000-1	1.0
RSE-10000-1.5	1.5
RSE-10000-2	2.0
RSE-10000-2.5	2.5
RSE-10000-3	3.0
RSE-10000-3.5	3.5
RSE-10000-4	4.0
RSE-10000-4.5	4.5
RSE-10000-5	5.0
RSE-10000-5.5	5.5
RSE-10000-6	6.0
RSE-10000-7	7.0
RSE-10000-8	8.0
RSE-10000-10	10.0

12,000KG ORANGE

CODE	LENGTH(M)
RSE-12L-3	3.0
RSE-12L-4	4.0
RSE-12L-5	5.0
RSE-12L-6	6.0
RSE-12L-8	8.0
RSE-12L-10	10.0
RSE-12L-12	12.0

15,000KG ORANGE

CODE	LENGTH(M)
RSE-15L-2	2.0
RSE-15L-6	6.0
RSE-15L-8	8.0
RSE-15L-12	12.0

20,000KG ORANGE

CODE	LENGTH(M)
RSE-20L-1.5	1.5
RSE-20L-2	2.0
RSE-20L-2.5	2.5
RSE-20L-3	3.0
RSE-20L-4	4.0
RSE-20L-4.5	4.5
RSE-20L-5	5.0

20,000KG ORANGE

CODE	LENGTH(M)
RSE-20L-6	6.0
RSE-20L-8	8.0
RSE-20L-10	10.0
RSE-20L-12	12.0

ROUND WEBBING SLING FOR USA MARKET

- All round slings meet or exceed US standard ASME B30.9
- Double jacket protect
- color coded to indicate capacity
- Low strain, wear-resistant, long life material 100% PES
- Length different available
- Length are measured from bearing point to bearing point
- WLL are rated vertically at 5:1 safety factor



TYPE	color	Rated Capacity (lbs.)			min hardware Dia(in)
		Vertical	Choker	Vertical Basket	
CL-RS26	PURPLE	2600	960	2400	1/2
CL-RS53	GREEN	5300	1920	4800	5/8
CL-RS84	YELLOW	8400	2880	7200	3/4
CL-RS132	RED	13200	3840	9600	1
CL-RS168	WHITE	16800	4800	12000	1
CL-RS212	BLUE	21200	5760	14400	1 1/4
CL-RS250	ORANGE	25000	2560	4800	1 1/2



WARNING
NEVER EXCEED PUBLISHED WORKING LOAD LIMIT

**HEAVY DUTY FLAT WEBBING SLING FOR USA MARKET**

- Meet or exceed US standard ASMEB30.9
- Class 7 webbing possessing a minimum certified tensile strength of 9800LBS/in width
- Low strain ,wear -resistance,long life material (100% PES)
- Safety factor 5:1
- Eyes are reforced with polyester wear pads
- Lengths are measured from bearing point to bearing point

Eye & Eye Flat (Type3)






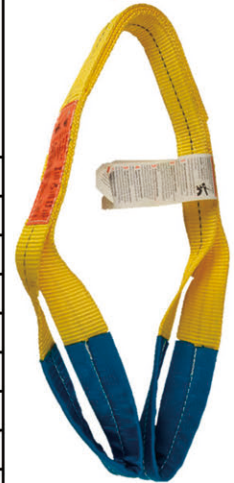
Eye & Eye Twist (Type 4)






Endless (Type 5)



Eye and Eye Slings Heavy duty (class 7)							
Plies of Web	Type	Wed Width (in.)	Eye Length (in.)	Rated Capacity (lbs.)			base Length(ft)
				 Vertical	 Choker	 Vertical Basket	
One Ply	CL-EE1-1	1	8-1/2	1600	1280	3200	3
	CL-EE1-2	2	10	3200	2560	6400	3
	CL-EE1-3	3	11	4700	3760	9400	3
	CL-EE1-4	4	12	6200	4960	12400	3
	CL-EE1-5	5	14	7800	6240	15600	3
	CL-EE1-6	6	16	9300	7440	18600	3
Two Ply	CL-EE2-1	1	8-1/2	3200	2560	6400	3
	CL-EE2-2	2	10	6400	5120	12800	3
	CL-EE2-3	3	11	8800	7040	17600	3
	CL-EE2-4	4	12	11500	9200	23000	3
	CL-EE2-5	5	14	13700	10960	27400	3
	CL-EE2-6	6	16	16500	13200	33000	3



◇ Standard length 3ft, 4ft, 5ft, 8ft, 10ft, 12ft, 15ft, 20ft, 25ft, 30ft

Endless sling class 7 (Type 5)						
Plies of Web	Model	Wed Width (in.)	Rated Capacity (lbs.)			base Length(ft)
			 Vertical	 Choker	 Vertical Basket	
One Ply	CL-EN1-1	1	3200	2560	6400	3
	CL-EN1-2	2	6400	5120	12800	3
	CL-EN1-3	3	8800	7040	17600	3
	CL-EN1-4	4	11500	9200	23000	3
	CL-EN1-5	5	13700	10960	27400	3
	CL-EN1-6	6	16500	13200	33000	3
Two Ply	CL-EN2-1	1	6200	4960	12400	3
	CL-EN2-2	2	12200	9760	24400	3
	CL-EN2-3	3	16700	13360	33400	3
	CL-EN2-4	4	20700	16560	41400	3
	CL-EN2-5	5	24600	19680	49200	3
	CL-EN2-6	6	28600	22880	57200	3



STANDARD DUTY FLAT WEBBING SLING

- Meet or exceed US standard ASMEb30.9
- Class 5 webbing possessing a minimum certified tensile strength of 6800LBS/in width
- Low strain ,wear -resistance,long life material (100% PES)
- Safety factor 5:1
- Eyes are reforced with polyester wear pads
- Lengths are measured from bearing point to bearing point




Eye & Eye Flat (Type3)






Eye & Eye Twist (Type 4)






Endless (Type 5)



Eye-Eye Sling (Type 3 and 4)							
Plies of Web	Model	Wed Width (in.)	Eye Length (in.)	Rated Capacity (lbs.)			base Length(ft)
				 Vertical	 Choker	 Vertical Basket	
One Ply	SEE1-1	1	8-1/2	1200	960	2400	3
	SEE1-2	2	10	2400	1920	4800	3
	SEE1-3	3	11	3600	2880	7200	3
	SEE1-4	4	12	4800	3840	9600	3
	SEE1-5	5	14	6000	4800	12000	3
	SEE1-6	6	16	7200	5760	14400	3
Two Ply	SEE2-1	1	8-1/2	2400	2560	4800	3
	SEE2-2	2	10	4800	3840	9600	3
	SEE2-3	3	11	6500	5200	13000	3
	SEE2-4	4	12	8600	6880	17200	3
	SEE2-5	5	14	10200	8160	20400	3
	SEE2-6	6	16	12300	9840	24600	3

◇ Standard length 3ft, 4ft, 5ft, 8ft, 10ft, 12ft, 15ft, 20ft, 25ft, 30ft

Endless sling (Type 5)						
Plies of Web	Model	Wed Width (in.)	Rated Capacity (lbs.)			base Length(ft)
			 Vertical	 Choker	 Vertical Basket	
One Ply	SEN1-1	1	2400	1920	4800	3
	SEN1-2	2	4800	3840	9600	3
	SEN1-3	3	6600	5280	13200	3
	SEN1-4	4	8800	7040	17600	3
	SEN1-5	5	11000	8800	22000	3
	SEN1-6	6	13200	10560	26400	3
Two Ply	SEN2-1	1	4800	3840	9600	3
	SEN2-2	2	9600	7680	19200	3
	SEN2-3	3	12500	10000	25000	3
	SEN2-4	4	15500	12400	31000	3
	SEN2-5	5	19400	15520	38800	3
	SEN2-6	6	23000	18400	46000	3



HEAVY DUTY FLAT WEBBING LING FOR LATIN AMERICA




- Heavy Duty Flat Webbing Slings safety factor 7:1
- Width in inch ,every inch width have one ton vertical load capacity
- Working length from bearing point to bearing point.
- Printed WLL on the webbing indicates the vertical rated load of slings for additional safety.
- Low strain, wear-resistance, long-life material (100% PES).



Eye & Eye Twist (Type 4)



Eye-Eye Sling (Type 4)


Plies of Web	Model	Web Width (inch)	Length (metre)	Rated Capacity (kgs.)		
				 Vertical	 Choker	 Vertical Basket
Two Ply	CL-LTFS24	2	4	2000	1600	4000
	CL-LTFS26	2	6	2000	1600	4000
	CL-LTFS28	2	8	2000	1600	4000
	CL-LTFS210	2	10	2000	1600	4000
	CL-LTFS34	3	4	3000	2400	6000
	CL-LTFS36	3	6	3000	2400	6000
	CL-LTFS38	3	8	3000	2400	6000
	CL-LTFS310	3	10	3000	2400	6000
	CL-LTFS44	4	4	4000	3200	8000
	CL-LTFS46	4	6	4000	3200	8000
	CL-LTFS48	4	8	4000	3200	8000
	CL-LTFS410	4	10	4000	3200	8000




Lifting Nets

Code	S.W.L kg	Size
CL5500202	5000	2 mtrs x 2 mtrs
CL5500303	5000	3 mtrs x 3 mtrs
CL5500404	5000	4 mtrs x 4 mtrs
CL5500505	5000	5 mtrs x 5 mtrs
CL5500606	5000	6 mtrs x 6 mtrs


Centre to Centre
measured as below




Pocket Pitch is 200mm
Centre to Centre

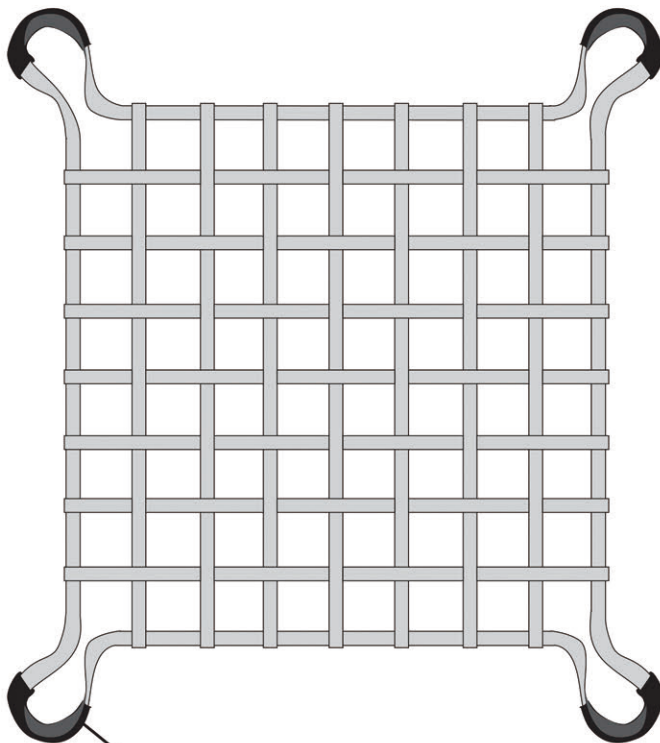

Standard Eye length is 1metre
C/w Reinforcement at lifting point

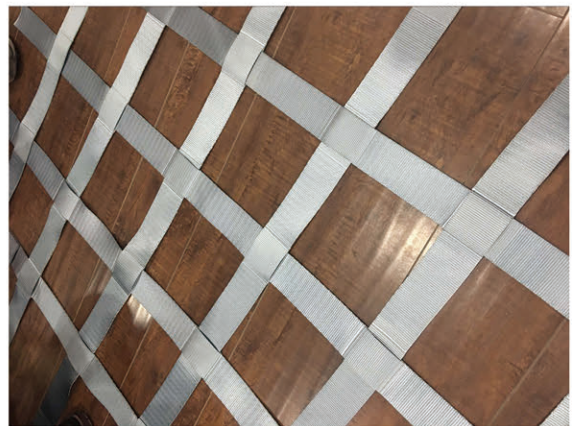

G80 WEB SLING CONNECTOR




- Forged super alloy steel -Quenched and Tempered.
- Suitable for web sling and G80 chain EN818-2
- Individually proof test at 2.5 times Working Load Limit.
- Fatiuge tested at 1.5 times Working Load Limit for 20000 cycles.
- Breakage test.
- 100% magnaflux crack detection.
- All load pins are 100% individually inspected and tested.
- Surface finish: Powder plastified.
- Colour code:red RAL3020/ yellow RAL 1003.

- Spare part - galvanized sleeve+black pin are available upon request

Item No.	Size (mm)	N.W. (kg)	WLL (T)	Dimension (mm)					
				A±1.5	B±2	K±2	W±2	G±1	E±1
HH19-6	6-8	0.2	1.12	15	60	56	40	18	7
HH19-7/8	7/8-8	0.3	2	20	61.5	63.7	40	24	9.5
HH19-10	10-8	0.68	3.15	24	66	83	39	30.5	11
HH19-13	13-8	1.47	5.3	28	88	93.7	55	36.8	16.5
HH19-16	16-8	2.3	8	34.5	108	120	65.5	45.2	19.8
HH19-20	20-8	3.3	12.5	41	129	138	80	51.8	23
HH19-22	22-8	6.89	15	50	191	180	126	70	26
HH19-26	26-8	10.62	21.2	58	228.4	209.5	152	32	30
HH19-32	32-8	18.92	31.5	72.5	252	279	160	91	55

G80 CLEVIS WEBBING SLING HOOK




HH58-2.2 HH58-1.6 HH58-2.75

- Forged super alloy steel -Quenched and Tempered.
- Suitable for web sling and G80 chain EN818-2
- Individually proof test at 2.5 times Working Load Limit.
- Fatiuge tested at 1.5 times Working Load Limit for 20000 cycles.
- Breakage test.
- 100% magnaflux crack detection.
- All load pins are 100% individually inspected and tested.
- Surface finish: Powder plastified.
- Colour code:red RAL3020/ yellow RAL 1003.

Item No.	N.W. (kg)	WLL (T)	B.L. (T)	Dimension (mm)					
				A±1	B±2	E±1	L±2	W±1.5	M±2
HH58-1.6	1.2	1.6	6.4	55	111	33	150	--	--
HH58-2.2	1.47	2.2	8.8	61	120	47	167	--	--
HH58-2.75	2.1	2.75	11	23	141	45	194	81.5	80

G80 FOR WEB SLING - ALLOY TRIANGLE RING FOR WEB SLING

Item No.	WEIGHT/kg	WLL/T	B.L/T	A	B	L
CLATR2	0.81	2	8	16	145	194
CLATR3	1.66	3	12	20	199	248
CLATR4	2.25	4	16	22	243	260
CLATR6	4.94	6	24	28	340	340





CHENLI RIGGING

Professional Manufacturer of Strapping, Lashing, and Lifting

<http://www.clsling.com>